

# jb<sup>®</sup> SMD Aluminum Electrolytic Capacitor – JCK

## ■ FEATURES

- Chip type, operating with wide temperature range -40~+105°C.
- Load Life of 1,000~2,000 hours
- Designed for surface mounting on high density circuit board.
- Emboss carrier tape packing system is available for automatic insertion.



## ■ SPECIFICATIONS

- Operating Temperature
- Voltage Range
- Capacitance Range
- Capacitance Tolerance
- Leakage Current

-40°C ~ +105°C  
 4V ~ 100V.DC  
 0.1 ~ 10000 μF  
 ±20% at 120Hz, 20°C  
 Leakage current (φ4~φ10) ≤0.01CV or 3μA, whichever is greater.  
 (after 2 minutes application of rated voltage)  
 Leakage current (φ12.5~φ16) ≤0.03CV or 4μA, whichever is greater.  
 (after 1 minutes application of rated voltage)

- Dissipation Factor (tan δ)

Measurement frequency: 120Hz, Temperature: 20°C

Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100
tanδ	0.35	0.3	0.24	0.2	0.16	0.14	0.14	0.12	0.12
(max)	φ4~φ10	0.42	0.38	0.34	0.26	0.22	0.18	0.14	0.12

- Stability At Low Temp.

Measurement frequency: 120Hz

Impedance Ratio Z1/Z20 (max.)	Rated Voltage (V)										
	φ4~φ10	Z(-25°C)/Z(20°C)		Z(-40°C)/Z(20°C)		Z(-25°C)/Z(20°C)		Z(-40°C)/Z(20°C)		Z(-25°C)/Z(20°C)	
		7	4	3	2	2	2	2	3	3	3
		15	8	6	4	4	3	3	4	4	4
	φ12.5~φ16	7	5	4	3	2	2	2	2	2	2
		17	12	10	8	5	4	3	3	3	3

- Load Life

After 2000 hours (1000hrs. for φ4~φ6.3x5.8) application of rated voltage at 105°C, they meet the characteristics listed below.

Capacitance Change	within ± 20% of initial value for capacitors of 10V or more (within ± 30% of initial value for capacitors of 4V & 6.3V)
Dissipation Factor	200% or less of initial specified value
Leakage Current	Initial specified value or less

- Self Life


After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above.

- Resistance to Soldering Heat

After reflow soldering and restored at room temperature, they meet the characteristics listed below.

Capacitance Change	Within ± 10% of initial value
tan δ	Initial specified value or less
Leakage Current	Initial specified value or less

## ■ DRAWING (Unit: mm)

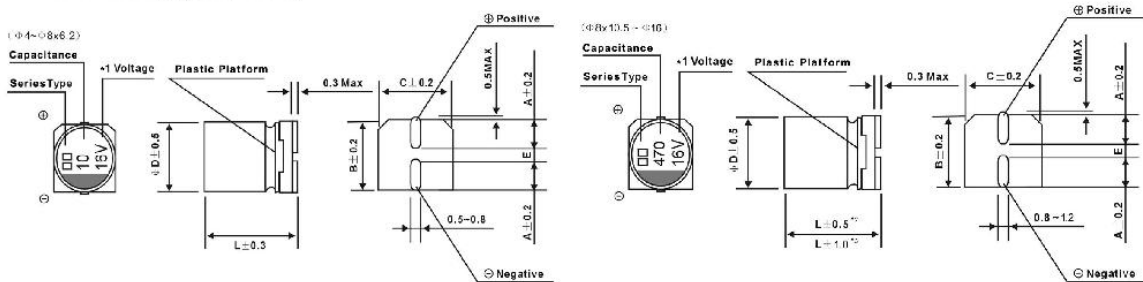

\*1 Voltage mark for 6.3V is [6V] \*2 Applicable to φ8x10.5~φ10 \*3 Applicable to φ12.5~φ16 (mm)

φDxL	4x5.4	5x5.4	6.3x5.4	6.3x7.7	8x6.2	8x10.5	10x10.5	10x13.5	12.5x13.5	12.5x16	16x16.5	16x21.5
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2	4.7	4.7	5.5	5.5
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0	13.0	17.0	17.0
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0	13.0	17.0	17.0
E±0.2	1.0	1.3	2.2	2.2	2.2	3.1	4.4	4.4	4.4	4.4	6.7	6.7
L	5.4	5.4	5.4	7.7	6.2	10.5	10.5	13.5	13.5	16.0	16.5	21.5

## ■ Frequency coefficient of allowable ripple current

Coefficient	Frequency		50Hz	120Hz	300Hz	1kHz	10kHz~
		φ4~φ10	0.1~68μF	0.70	1.00	1.17	1.36
	φ12.5~φ16	100~3300μF	0.85	1.00	1.08	1.20	1.30
		~68μF	0.75	1.00	1.35	1.57	2.00
		100~680μF	0.8	1.00	1.23	1.34	1.50
		1000~10000μF	0.85	1.00	1.10	1.13	1.15

Please visit our website to get more update data, those data & specification are subject to change without notice.

**materialboerse.de**  
 Der Handelsplatz für elektronische Bauelemente  
 Käthe-Keller-Str. 105J, 30853 Langenlengen, Germany  
 fon: +49 511 9782000  
 fax: +49 511 9782001  
 mail: info@materialboerse.de  
 net: www.materialboerse.de

**jb<sup>®</sup> Capacitors Company**

Web-site: www.jbcapacitors.com  
 E-mail: info@jbcapacitors.com  
 Tel : (852)2790 5091  
 Fax: (852)8169 8283



# SMD Aluminum Electrolytic Capacitor – JCK

## ■ STANDARD SIZE

WV/V Cap/µF	4 0G		6.3 0J		10 1A		16 1C		25 1E		35 1V		50 1H		
0.1	0R1	--	--	--	--	--	--	--	--	--	--	--	4x5.4	0.7	
0.22	R22	--	--	--	--	--	--	--	--	--	--	--	4x5.4	1.6	
0.33	R33	--	--	--	--	--	--	--	--	--	--	--	4x5.4	2.5	
0.47	R47	--	--	--	--	--	--	--	--	--	--	--	4x5.4	3.5	
1	010	--	--	--	--	--	--	--	--	--	--	--	4x5.4	7	
2.2	2R2	--	--	--	--	--	--	--	--	--	--	--	4x5.4	11	
3.3	3R3	--	--	--	--	--	--	--	--	--	--	--	4x5.4	13	
4.7	4R7	--	--	--	--	--	--	--	--	--	--	--	5x5.4 (4x5.4)	16 (13)	
10	100	--	--	--	--	--	4x5.4	18	5x5.4 (4x5.4)	20 (14)	5x5.4 (4x5.4)	21 (14)	6.3x5.4	24	
22	220	--	--	4x5.4	22	5x5.4 (4x5.4)	25 (20)	5x5.4 (4x5.4)	27 (20)	6.3x5.4 (5x5.4)	36 (25)	6.3x5.4	38	6.3x7.7 (6.3x5.4) (8x6.2)	51 (42) (70)
33	330	5x5.4 (4x5.4)	30 (18)	5x5.4 (4x5.4)	27 (22)	5x5.4 (4x5.4)	30 (22)	6.3x5.4 (5x5.4)	40 (28)	6.3x5.4 (5x5.4)	44 (29)	6.3x5.4 (8x6.2)	42 (84)	6.3x7.7	60
47	470	5x5.4 (4x5.4)	36 (24)	5x5.4 (4x5.4)	33 (25)	6.3x5.4 (5x5.4)	41 (30)	6.3x5.4 (5x5.4)	48 (31)	6.3x5.4 (8x6.2)	48 (91)	6.3x7.7 (6.3x5.8)	70 (50)	8x10.5 (6.3x7.7)	120 (63)
100	101	6.3x5.4 (5x5.4)	60 (43)	6.3x5.4 (5x5.4)	50 (39)	6.3x5.4 (8x6.2)	53 (110)	6.3x5.4 (8x6.2)	60 (120)	6.3x7.7	61	8x10.5 (6.3x7.7)	120 (84)	10x10.5 (8x10.5)	170 (140)
150	151	6.3x5.4	52	6.3x5.4	55	6.3x5.4	62	6.3x7.7	95	8x10.5 (6.3x7.7)	140 (100)	8x10.5	155	10x10.5	170
220	221	6.3x5.4	57	6.3x7.7 (6.3x5.8)	105 (67)	6.3x5.8 (8x6.2)	67 (105)	8x10.5 (8x6.2)	150 (105)	8x10.5	175	10x10.5 (8x10.5)	220 (190)	10x13.5 (10x10.5)	280 (220)
330	331	6.3x7.7	100	6.3x7.7	105	8x10.5	196	8x10.5	195	10x10.5 (8x10.5)	240 (220)	10x10.5	245	16x16.5 (12.5x13.5) (10x13.5)	600 (420) (295)
470	471	6.3x7.7	105	8x10.5 (6.3x7.7)	210 (120)	10x10.5 (8x10.5)	260 (210)	10x10.5 (8x10.5)	295 (230)	10x10.5	280	12.5x13.5 (10x13.5) (10x10.5)	520 (395) (280)	16x16.5 (12.5x16)	700 (520)
680	681	8x10.5	210	8x10.5	210	10x10.5	270	10x10.5	315	10x13.5	400	12.5x13.5 (10x13.5)	530 (395)	16x16.5	750
1000	102	8x10.5	230	10x10.5 (8x10.5)	300 (230)	10x10.5	315	12.5x13.5 (10x13.5) (10x10.5)	500 (390) (340)	12.5x13.5	580	16x16.5 (12.5x16)	750 (600)	16x21.5	1000
1500	152	10x10.5	315	10x13.5 (10x10.5)	450 (315)	10x13.5	460	12.5x13.5	550	12.5x16	850	--	--	--	--
2200	222	10x13.5 (10x10.5)	440 (340)	12.5x13.5 (10x13.5)	520 (500)	12.5x13.5	680	16x16.5 (12.5x16)	950 (750)	16x16.5 16x21.5	1050 1250	16x21.5	1300	--	--
3300	333	10x13.5	490	12.5x16 (12.5x13.5)	700 (660)	16x16.5	1000	16x16.5 16x21.5	1000 1200	16x21.5	1400	--	--	--	--
4700	472	12.5x13.5	600	16x16.5 16x21.5	1000 1200	16x21.5	1300	16x21.5	1350	--	--	--	--	--	--
6800	682	16x16.5 (12.5x16)	950 (650)	16x21.5	1250	--	--	--	--	--	--	--	--	--	--
10000	103	16x21.5	250	--	--	--	--	--	--	--	--	--	--	--	--

WV/V Cap/µF	6.3 1J		100 2A	
0.1	0R1	4x5.4	0.7	--
0.22	R22	4x5.4	1.6	--
0.33	R33	4x5.4	2.5	--
0.47	R47	4x5.4	3.5	--
1	010	4x5.4	7	4x5.4
2.2	2R2	4x5.4	11	6.3x5.4
3.3	3R3	5x5.4	13	6.3x7.7
4.7	4R7	5x5.4	16	6.3x5.4
10	100	6.3x7.7 (6.3x5.4) (8x6.2)	39 (24) (25)	8x10.5 (6.3x7.7)
22	220	8x10.5 (6.3x7.7)	98 (49)	10x10.5 (8x10.5)
33	330	8x10.5	112	10x10.5
47	470	10x10.5 (8x10.5)	160 (119)	12.5x13.5 (10x13.5) (10x10.5)
68	680	--	--	12.5x13.5 (10x13.5)
100	101	12.5x13.5 (10.5x13.5) (10x10.5)	270 (210) (196)	16x16.5 (12.5x13.5)
150	151	10x13.5	225	--
220	221	16x16.5 (12.5x13.5) (10x13.5)	360 (470) (235)	16x16.5 16x21.5
330	331	16x16.5 (12.5x16)	700 (510)	16x21.6
470	471	16x16.5 16x21.5	750 900	--
680	681	16x21.5	950	Case size
				Allowable ripple

Please visit our website to get more update data, those data & specification are subject to change without notice.

**materialboerse.de**  
 Der Handelsplatz für elektronische Bauelemente  
 Karl-Keller-Str. 103, 30853 Langenhagen, Germany  
 Tel: +49 511 9782000  
 Fax: +49 511 9782001  
 mail: info@materialboerse.de  
 net: www.materialboerse.de

**jb Capacitors Company**  
 Web-site: www.jbcapacitors.com  
 E-mail: info@jbcapacitors.com  
 Tel : (852)2790 5091  
 Fax: (852)8169 8283